https://amironic.co.il/

KK
KK-SS

MECHANICAL

Rounded End Feather Keys

DIN 6885A



Part Number Steel	Part Number Stainless	W h9	H h11	L +0.00 -0.25	h	p
KK2-10	KK2-10SS	2	2	10	1.0	1.2
KK2-14	KK2-14SS	2	2	14	1.0	1.2
KK2-20	KK2-20SS	2	2	20	1.0	1.2
KK2-22	KK2-22SS	2	2	22	1.0	1.2
KK2-25	KK2-25SS	2	2	25	1.0	1.2
KK3-8	KK3-8SS	3	3	8	1.4	1.8
KK3-10	KK3-10SS	3	3	10	1.4	1.8
KK3-12	KK3-12SS	3	3	12	1.4	1.8
KK3-15	KK3-15SS	3	3	15	1.4	1.8
KK3-18	KK3-18SS	3	3	18	1.4	1.8
KK3-20	KK3-20SS	3	3	20	1.4	1.8
KK3-30	KK3-30SS	3	3	30	1.4	1.8
KK3-40	KK3-40SS	3	3	40	1.4	1.8
KK4-8	KK4-8SS	4	4	8	1.8	2.5
KK4-10	KK4-10SS	4	4	10	1.8	2.5
KK4-12	KK4-12SS	4	4	12	1.8	2.5
KK4-14	KK4-14SS	4	4	14	1.8	2.5
KK4-15	KK4-15SS	4	4	15	1.8	2.5
KK4-16	KK4-16SS	4	4	16	1.8	2.5
KK4-18	KK4-18SS	4	4	18	1.8	2.5
KK4-20	KK4-20SS	4	4	20	1.8	2.5
KK4-25	KK4-25SS	4	4	25	1.8	2.5
KK4-30	KK4-30SS	4	4	30	1.8	2.5
KK5-10	KK5-10SS	5	5	10	2.3	3.0
KK5-12	KK5-12SS	5	5	12	2.3	3.0
KK5-14	KK5-14SS	5	5	14	2.3	3.0
KK5-15	KK5-15SS	5	5	15	2.3	3.0
KK5-16	KK5-16SS	5	5	16	2.3	3.0
KK5-18	KK5-18SS	5	5	18	2.3	3.0
KK5-20	KK5-20SS	5	5	20	2.3	3.0
KK5-25	KK5-25SS	5	5	25	2.3	3.0
KK5-30	KK5-30SS	5	5	30	2.3	3.0
KK5-32	KK5-32SS	5	5	32	2.3	3.0
KK5-35	KK5-35SS	5	5	35	2.3	3.0
KK5-40	KK5-40SS	5	5	40	2.3	3.0
KK5-45	-	5	5	45	2.3	3.0
KK5-50	KK5-50SS	5	5	50	2.3	3.0
-	KK6-10SS	6	6	10	2.8	3.5
KK6-12	KK6-12SS	6	6	12	2.8	3.5
KK6-14	KK6-14SS	6	6	14	2.8	3.5
KK6-16	KK6-16SS	6	6	16	2.8	3.5
KK6-18	KK6-18SS	6	6	18	2.8	3.5
KK6-20	KK6-20SS	6	6	20	2.8	3.5
KK6-25	KK6-25SS	6	6	25	2.8	3.5
KK6-28	KK6-28SS	6	6	28	2.8	3.5
KK6-30	KK6-30SS	6	6	30	2.8	3.5
KK6-32	KK6-32SS	6	6	32	2.8	3.5
KK6-40	KK6-40SS	6	6	40	2.8	3.5
KK6-45	KK6-45SS	6	6	45	2.8	3.5
KK6-50	KK6-50SS	6	6	50	2.8	3.5
KK8-7-18	KK8-7-18SS	8	7	18	3.3	4.0
KK8-7-20	KK8-7-20SS	8	7	20	3.3	4.0
KK8-7-22	KK8-7-22SS	8	7	22	3.3	4.0
KK8-7-25	KK8-7-25SS	8	7	25	3.3	4.0
KK8-7-30	KK8-7-30SS	8	7	30	3.3	4.0
KK8-7-35	KK8-7-35SS	8	7	35	3.3	4.0
KK8-7-40	KK8-7-40SS	8	7	40	3.3	4.0
KK8-7-50	KK8-7-50SS	8	7	50	3.3	4.0
KK10-8-20	KK10-8-20SS	10	8	20	3.3	5.0
KK10-8-25	KK10-8-25SS	10	8	25	3.3	5.0
KK10-8-28	KK10-8-28SS	10	8	28	3.3	5.0
KK10-8-30	KK10-8-30SS	10	8	30	3.3	5.0
-	KK10-8-35SS	10	8	35	3.3	5.0
KK10-8-36	KK10-8-36SS	10	8	36	3.3	5.0
KK10-8-40	KK10-8-40SS	10	8	40	3.3	5.0
KK10-8-45	KK10-8-45SS	10	8	45	3.3	5.0
KK10-8-50	KK10-8-50SS	10	8	50	3.3	5.0
KK10-8-60	KK10-8-60SS	10	8	60	3.3	5.0
-	KK12-8-20SS	12	8	20	3.3	5.0
KK12-8-25	KK12-8-25SS	12	8	25	3.3	5.0
KK12-8-30	KK12-8-30SS	12	8	30	3.3	5.0
KK12-8-35	KK12-8-35SS	12	8	35	3.3	5.0
KK12-8-36	KK12-8-36SS	12	8	36	3.3	5.0
KK12-8-40	KK12-8-40SS	12	8	40	3.3	5.0
KK12-8-45	KK12-8-45SS	12	8	45	3.3	5.0
KK12-8-50	KK12-8-50SS	12	8	50	3.3	5.0
KK12-8-56	KK12-8-56SS	12	8	56	3.3	5.0
KK12-8-60	KK12-8-60SS	12	8	60	3.3	5.0
KK14-9-50	KK14-9-50SS	14	9	50	3.8	5.5
KK14-9-70	KK14-9-70SS	14	9	70	3.8	5.5

Material

KK Type: C45k Key Steel. **Minimum Tensile Strength:** 60kg/mm^2. **KK-SS Type:** A4 Stainless Steel.

Keys supplied to DIN 6885A (ISO 2491A, BS 46 Type A) with 2 Round Ends.
DIN 6885B (ISO 2491B, BS 46 Type B) 2 square ends) available, P.O.A.
DIN 6885AB (ISO 2491AB, BS 46 Type C) 1 square and 1 round end) available, P.O.A.
Other lengths and specials available, P.O.A. Inch sizes available, P.O.A.
Larger sizes up to 45 x 25 available, P.O.A.

Shaft size (from & to, inclusive) vs. key size: 6 to 8 = 2 x 2, **9 to 10** = 3 x 3, **11 to 12** = 4 x 4, **13 to 17** = 5 x 5, **18 to 22** = 6 x 6, **23 to 30** = 8 x 7, **31 to 38** = 10 x 8, **39 to 44** = 12 x 8, **45 to 50** = 14 x 9, **51 to 58** = 16 x 10, **59 to 65** = 18 x 11.

Machining Details



+44 (0)1246 455500
+44 (0)1246 455522
ondrives
sales@ondrives.com
www.ondrives.com

Product information updated April 2017 and subject to change. Please click the product links for prices and availability.

https://amironic.co.il/

https://amironic.co.il/

MECHANICAL

KU

Woodruff Keys

DIN 6888, ISO 3912

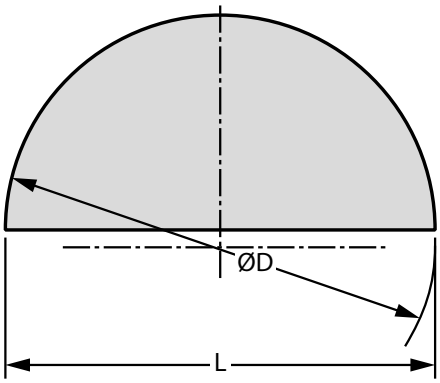



Part Number	Width W h9	Height H h12	Length L	ØD
KU1.5-7	1.5	2.6	6.75	7
KU2-7	2.0	2.6	6.75	7
KU2-10	2.0	3.7	9.66	10
KU2-13	2.0	5.0	12.65	13
KU2.5-10	2.5	3.7	9.66	10
KU3-10	3.0	3.7	9.66	10
KU3-13	3.0	5.0	12.65	13
KU3-16	3.0	6.5	15.72	16
KU4-13	4.0	5.0	12.65	13
KU4-16	4.0	6.5	15.72	16
KU4-19	4.0	7.5	18.57	19
KU5-16	5.0	6.5	15.72	16
KU5-19	5.0	7.5	18.57	19
KU5-22	5.0	9.0	21.63	22
KU5-25	5.0	10.0	24.49	25
KU6-19	6.0	7.5	18.57	19
KU6-22	6.0	9.0	21.63	22
KU6-25	6.0	10.0	24.49	25
KU6-28	6.0	11.0	27.35	28
KU8-22	8.0	9.0	21.63	22
KU8-28	8.0	11.0	27.35	28
KU8-32	8.0	13.0	31.43	32
KU10-28	10.0	11.0	27.35	28
KU10-32	10.0	13.0	31.43	32
KU10-45	10.0	16.0	43.08	45

Material

C45k Key Steel.

Also available in Inch sizes to BS46 Part 1, P.O.A.

https://amironic.co.il/

https://amironic.co.il/

KS
KS-SS

MECHANICAL

Keysteel

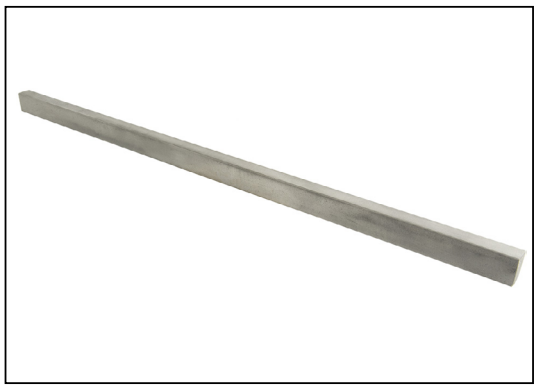

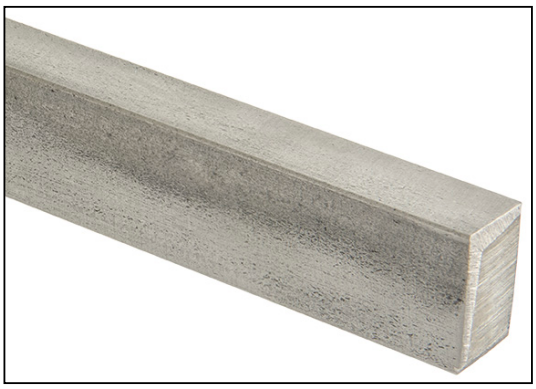

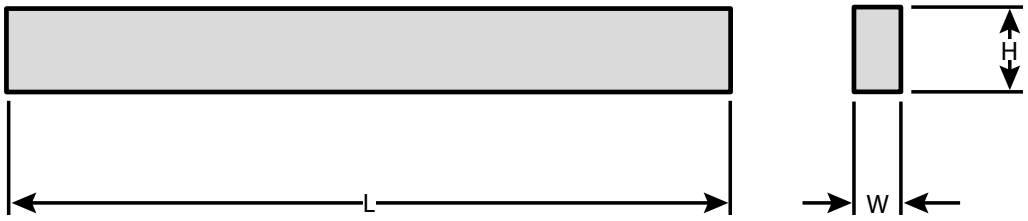

Part Number		Width	Height	Length
Steel	Stainless	W	H	L
KS-2	KS-2SS	2	2	300
KS-3	KS-3SS	3	3	300
KS-4	KS-4SS	4	4	300
KS-5	KS-5SS	5	5	300
KS-6	KS-6SS	6	6	300
KS-8	KS-8SS	8	8	300
KS-87	KS-87SS	8	7	300
KS-10	KS-10SS	10	10	300
KS-108	KS-108SS	10	8	300
KS-12	KS-12SS	12	12	300
KS-128	KS-128SS	12	8	300
KS-14	KS-14SS	14	14	300
KS-149	KS-149SS	14	9	300
KS-1610	KS-1610SS	16	10	300
KS-1811	KS-1811SS	18	11	300
KS-2012	KS-2012SS	20	12	300
KS-2214	KS-2214SS	22	14	300
KS-2514	KS-2514SS	25	14	300

Material

KS Type: C45k Key Steel.
KS-SS Type: A4 Stainless Steel.

Also available in 1,000mm lengths, P.O.A.
Larger sizes up to 56 x 32mm available, P.O.A.

https://amironic.co.il/

https://amironic.co.il/

MECHANICAL

GHK

Gib Head Keys

DIN 6887, ISO 2492

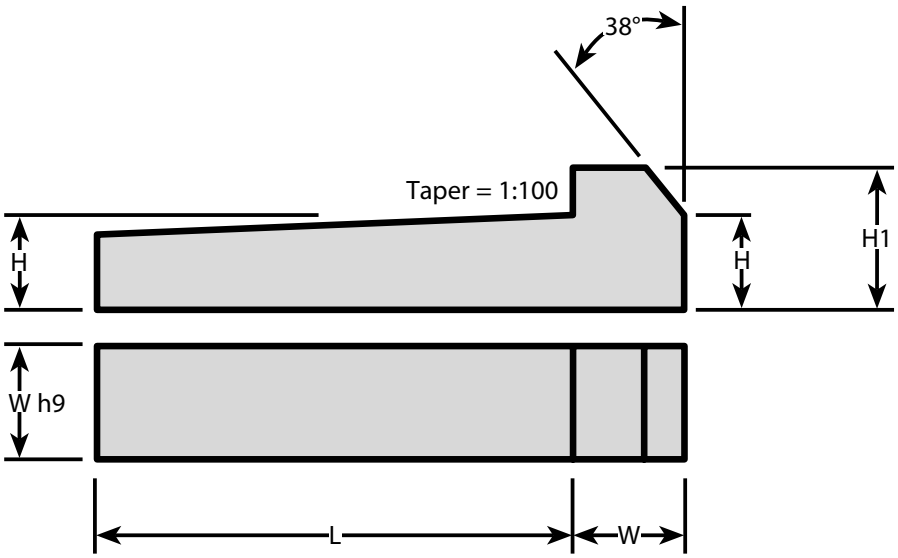

Part Number	Width W h9	Height H	Length L	Height H1
GHK8-40	8	7	40	11
GHK8-50	8	7	50	11
GHK8-60	8	7	60	11
GHK8-70	8	7	70	11
GHK8-80	8	7	80	11
GHK10-40	10	8	40	12
GHK10-50	10	8	50	12
GHK10-60	10	8	60	12
GHK10-70	10	8	70	12
GHK10-80	10	8	80	12
GHK10-90	10	8	90	12
GHK10-100	10	8	100	12
GHK12-40	12	8	40	12
GHK12-50	12	8	50	12
GHK12-60	12	8	60	12
GHK12-70	12	8	70	12
GHK12-80	12	8	80	12
GHK12-90	12	8	90	12
GHK12-100	12	8	100	12
GHK14-50	14	9	50	14
GHK14-60	14	9	60	14
GHK14-70	14	9	70	14
GHK14-80	14	9	80	14
GHK14-90	14	9	90	14
GHK14-100	14	9	100	14
GHK16-60	16	10	60	16
GHK16-70	16	10	70	16
GHK16-80	16	10	80	16
GHK18-60	18	11	60	18
GHK18-70	18	11	70	18
GHK18-80	18	11	80	18
GHK18-90	18	11	90	18
GHK18-100	18	11	100	18
GHK18-140	18	11	140	18

Material

C45k Key Steel. Also available in Stainless Steel, P.O.A.

Minimum Tensile Strength: 55kg/mm^2.

Other lengths available, P.O.A. Also available in Inch sizes to BS46 Part 1, P.O.A.
All sizes from 4 x 4 up to 50 x 28 available, P.O.A.

+44 (0)1246 455500
+44 (0)1246 455522
ondrives
sales@ondrives.com
www.ondrives.com
Product information updated April 2017 and subject to change. Please click the product links for prices and availability.
https://amironic.co.il/